

## Cisco 2600, 2800, 3700, and 3800 Series Content Engine Network Modules

### Intelligent Caching, Content Delivery, and Wide Area File Services for Cisco Routers

Figure 1. Cisco 2600, 2800, 3600, 3700, and 3800 Series Content Engine Network Module



The Cisco® 2600, 2800, 3600, 3700, and 3800 series Content Engine Network Modules (NM) offer the industry's first and only router-integrated application platform for accelerating data center-based applications, enabling consolidation of infrastructure into the data center.

The Content Engine Network Modules can be deployed with the following software options:

- **Cisco ACNS (Application and Content Networking System) Software**—Cisco ACNS software helps organizations of all sizes to reduce costs, increase productivity, and increase revenue by extending strategic applications and content from the data center to the branch. Cisco ACNS provides the following benefits:
  - **Web Application Acceleration**—Accelerating delivery of enterprise application data to the enterprise edge
  - **Secure Web Content Access Management**—Edge security, antivirus, and filtering capabilities stop unwanted traffic before it traverses the WAN
  - **Business Video**—Eases the pains of delivering rich media (eLearning, webcasts) to remote users
  - Point-of-sale video and Web kiosks
  - For more details about the Cisco ACNS Software, please refer to the Cisco ACNS software data sheet at: [http://www.cisco.com/en/US/products/sw/conntsw/ps491/products\\_data\\_sheet0900aecd80261a22.html](http://www.cisco.com/en/US/products/sw/conntsw/ps491/products_data_sheet0900aecd80261a22.html)
- **Cisco WAFS (Wide Area File Services) Software**—Cisco WAFS provide users with LAN-like performance when accessing centralized file storage over the WAN. Through advanced protocol optimizations, intelligent data and metadata caching, and WAN optimizations, Cisco WAFS enables file storage consolidation into the data center, thereby providing significant reduction in the total cost of ownership (TCO) of storage, storage management, and data protection. Cisco WAFS provides the following benefits:
  - **File and Print Server Consolidation**—Remove costly and difficult to manage file and print servers from the remote office
  - **Remote Branch Data Protection**—With data consolidated into the data center, data can be protected centrally, eliminating the need for branch office backup systems
  - **File Access and Collaboration**—Centralized file storage enables true global collaboration and minimizes the number of redundant copies of files in the enterprise

- **Software Distribution**—Advanced file caching techniques integrate seamlessly with software distribution systems that utilize CIFS for package delivery, eliminating the need for branch office software distribution servers
- For more details about the Cisco WAFS Software, refer to the data sheet at:  
[http://www.cisco.com/en/US/products/ps6469/products\\_data\\_sheet0900aecd80323a4e.html](http://www.cisco.com/en/US/products/ps6469/products_data_sheet0900aecd80323a4e.html)

## INTEGRATED APPLICATION ACCELERATION AND BRANCH-OFFICE ROUTING

By offering integrated application acceleration and branch-office routing in a single package, Cisco Systems® reduces the complexity and costs of value-added services, while optimizing WAN bandwidth and reducing operational costs. Organizations can take a phased approach, starting small with fewer services and incrementally adding services. For example—an organization can start with a simple service, such as accelerating security patch distribution or URL filtering, and then add video-based e-learning or corporate communications.


Compared to standalone appliances, the Content Engine Network Module in the branch-office router offers the following advantages:

- **Physical Space Savings**—The Content Engine uses a single network-module slot in a modular Cisco Integrated Services Router or legacy Cisco router
- **Simple Power and Cable Management**—The module takes advantage of the router power options, including DC power and redundant power
- **Common Management Interface**—The module can be configured and managed from the Cisco IOS® Software command-line interface (CLI)
- **Choice of Network Interfaces for Maximum Flexibility**—The internal Fast Ethernet interface on the router backplane provides seamless integration. The external Fast Ethernet interface provides maximum performance when connected to an external LAN switch such as the Cisco Catalyst family or Cisco Express family
- **Separate Processor for the Content Engine Network Module Maximizes Availability**—A service interruption on the Content Engine Network Module does not affect services on the router
- **Lower Operational Costs**—The module is covered under Cisco maintenance service for the router, minimizing network operational costs and complexity

## HARDWARE ARCHITECTURE

The Content Engine Network Module provides a separate processor to run application acceleration and WAN optimization software within the Cisco 2600, 2800, 3600, 3700, and 3800 series routers. The Content Engine Network Module software communicates to the Cisco IOS Software in the router through the internal Fast Ethernet interface (Figure 2). The Cisco IOS Software can establish a console session to the Content Engine Network Module console through the **service-module content-engine <slot>/0 session** command. Module status is available with the Cisco IOS Software **service-module content-engine <slot>/0 status** command.

**Figure 2.** Architecture of the Integrated Content Engine Network Module and Router

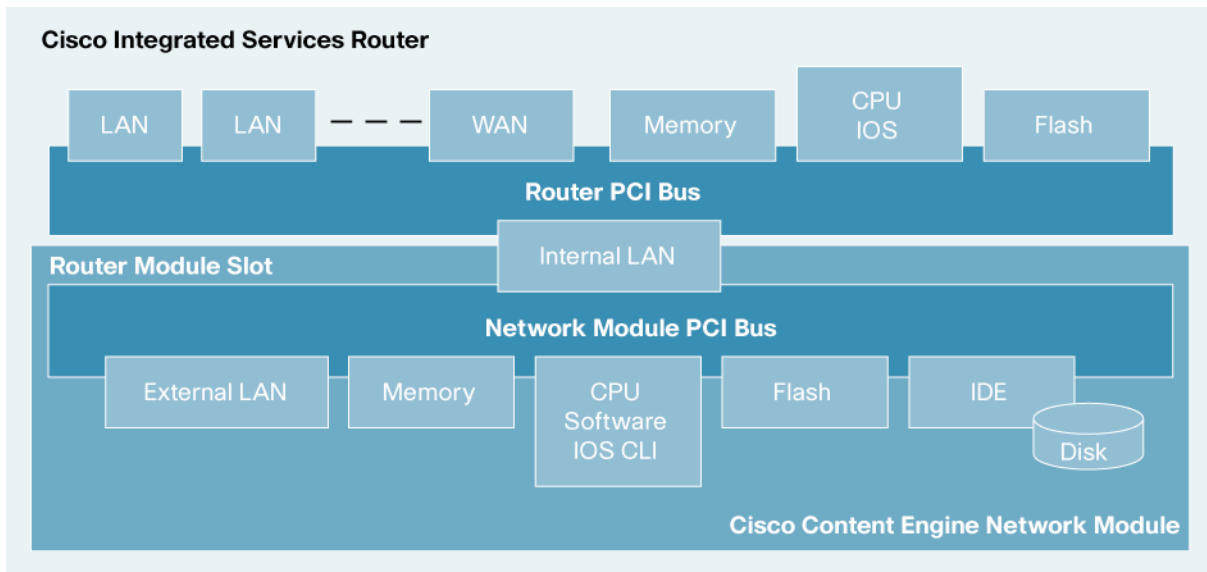

**CISCO 2600, 2800, 3600, 3700, AND 3800 SERIES CONTENT ENGINE NETWORK MODULE PRODUCT SUMMARY**

Table 1 lists the part numbers and descriptions for the Cisco 2600, 2800, 3600, 3700, and 3800 series Content Engine Network Modules.

**Table 1.** Content Engine Network Modules

Part Number	Description
<b>NM-CE-BP-40G-K9(=)</b>	Content Engine Network Module, basic performance, 40-GB Integrated Drive Electronics (IDE) hard disk
<b>NM-CE-BP-80G-K9(=)</b>	Content Engine Network Module, basic performance, 80-GB IDE hard disk; supported in Cisco ACNS Software v5.1 and later
<b>NM-CE-BP-SCSI(=)</b>	Content Engine Network Module, basic performance, Small Computer System Interface (SCSI) controller (requires external SCSI disk array)

Table 2 lists the hardware options and spare parts for the Cisco 2600, 2800, 3600, 3700, and 3800 series WAN application network modules.

**Table 2.** Hardware Options and Spares

Part Number	Description
<b>EM-CE-40G=</b>	Expansion module, 40-GB IDE, field upgrade (for Cisco ACNS only)
<b>EM-CE-80G=</b>	Expansion module, 80-GB IDE, field upgrade
<b>EM-CE-SCSI=</b>	Expansion module, SCSI controller, field upgrade
<b>MEM-CE-256D=</b>	256-MB DRAM field upgrade
<b>MEM-256CF-5.1-K9=</b>	256-MB compact flash memory with Cisco ACNS Software recovery image

Table 3 lists the software options and licenses for the Cisco 2600, 2800, 3600, 3700, and 3800 series Content Engine Network Modules.

**Table 3.** Cisco ACNS Software Options and Licenses

Part Number	Description
<b>SF-ACNS-5.3-K9</b>	Cisco ACNS Software version 5.3
<b>SF-ACNS-5.2-K9</b>	Cisco ACNS Software version 5.2
<b>AK-ACNS-5.1-K9=</b>	Cisco ACNS Software version 5.3 accessory kit, spare
<b>SF-NM-RCPS(=)</b> <b>SF-NM-RCPS-8.0</b>	<ul style="list-style-type: none"> <li>RealNetworks RealSystem version 9 combined proxy and server for Cisco Content Engine Network Modules</li> <li>Combined RealSystem v8 proxy and subscriber for Cisco Content Engine Network Modules</li> </ul>
<b>SF-WMS-56(=)</b>	Microsoft Windows Media server for Cisco ACNS Software and Content Engine Network Module—supports up to 56 Mbps
<b>SF-CE-510-TL-5.0(=)</b>	Multicast client replication software for Cisco ACNS Software and Content Engine Network Module
<b>SF-SMF12</b>	SmartFilter software 12-month subscription for Cisco ACNS Software (pricing option depends on number of users)
<b>SF-SMF24</b>	SmartFilter software 24-month subscription for Cisco ACNS Software (pricing option depends on number of users)
<b>SF-SMF36</b>	SmartFilter software 36-month subscription for Cisco ACNS Software (pricing option depends on number of users)
<b>SF-WEB12</b>	Websense Enterprise Master Database 12-month subscription (pricing option per 100 users)
<b>SF-WEB24</b>	Websense Enterprise Master Database 24-month subscription (pricing option per 100 users)
<b>SF-WEB36</b>	Websense Enterprise Master Database 36-month subscription (pricing option per 100 users)

Table 4 lists the Cisco WAFS Software options and licenses.

The Cisco WAFS Software is supported only on the Content Engine Network Module model NM-CE-BP-80G-K9 with 512 MB of RAM and an 80 GB extended-availability hard drive.

**Table 4.** Cisco WAFS Software Options and Licenses

Part Number	Description
<b>SF-WAFS-3.0-NM-K9</b>	Cisco WAFS Software for one Content Engine Network Module

Table 5 lists the routers that support the Cisco 2600, 2800, 3600, 3700, and 3800 series Content Engine Network Modules. Multiple Content Engine Network Modules may be installed within modular routers, assuming slots are available.

**Table 5.** Cisco Routers Supporting Cisco 2600, 2800, 3600, 3700, and 3800 Content Engine Network Modules

Cisco Router	NM-CE-BP-40G-K9	NM-CE-BP-80G-K9
<b>Cisco 2600 Series</b>	Yes	Yes
<b>Cisco 2600XM Series Multiservice Platform</b>	Yes	Yes
<b>Cisco 2691 Multiservice Platform</b>	Yes	Yes
<b>Cisco 2801 Integrated Services Router</b>	No	No
<b>Cisco 2811 Integrated Services Router</b>	Yes	Yes
<b>Cisco 2821 Integrated Services Router</b>	Yes	Yes
<b>Cisco 2851 Integrated Services Router</b>	Yes	Yes

Cisco Router	NM-CE-BP-40G-K9	NM-CE-BP-80G-K9
Cisco 3640 and 3640A Multiservice Platform	Yes	Yes
Cisco 3660 Multiservice Platform	Yes	Yes
Cisco 3725 Multiservice Access Router	Yes	Yes
Cisco 3745 Multiservice Access Router	Yes	Yes
Cisco 3825 Integrated Services Router	Yes	Yes
Cisco 3845 Integrated Services Router	Yes	Yes

## CISCO IOS SOFTWARE SUPPORT

The Cisco 2600, 2800, 3600, 3700, and 3800 series Content Engine Network Modules require Cisco IOS Software Release 12.2(13)T or later.

Table 6 gives hardware specifications for the Cisco 2600, 2800, 3600, 3700, and 3800 series Content Engine Network Modules.

**Table 6.** Hardware Specifications

Feature	Specifications
Network Sizing	Small branch offices
<b>Hardware Features</b>	
Processor	500-MHz Intel Mobile Pentium III
Default Synchronous Dynamic RAM (SDRAM)	512 MB
Maximum SDRAM	512 MB
Internal Disk Storage	<ul style="list-style-type: none"> <li>The basic performance 40GB Content Engine Network Module, model NM-CE-BP-40G-K9) has an internal 40GB IDE disk drive</li> <li>The basic performance 80GB Content Engine Network Module, model NM-CE-BP-80G-K9) has an internal 80GB IDE disk drive with extended availability characteristics</li> </ul>
Network Interfaces	<ul style="list-style-type: none"> <li>One internal 10-/100-Mbps Ethernet interface to router backplane</li> <li>One External 10-/100-Mbps Ethernet Interface</li> </ul>
Flash Memory	16-MB internal memory plus optional external compact flash memory
<b>Physical Specifications</b>	
Dimensions (H x W x D)	1.55 x 7.10 x 7.2 inches (3.9 x 18.0 x 18.3 centimeters)
Weight	1.5 lb (0.7 kg) maximum
Operating Humidity	5 to 95% noncondensing
Operating Temperature	41 to 104°F (5 to 40°C)
Nonoperating Temperature	40 to 185°F (40 to 85°C)
Operational Altitude	0–10,000 feet (0–3000 meters)
Safety	UL 1950; CSA-C22.2 No. 950; EN 60950; and IEC 60950
EMC	FCC Part 15 Class A; EN55022 Class B; AS/NZS 3548 Class A; CISPR22 Class B; VCCI Class B; EN55024; EN61000-3-2; and EN61000-3-3



#### **Corporate Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 526-4100

#### **European Headquarters**

Cisco Systems International BV  
Haarlerbergpark  
Haarlerbergweg 13-19  
1101 CH Amsterdam  
The Netherlands  
www-europe.cisco.com  
Tel: 31 0 20 357 1000  
Fax: 31 0 20 357 1100

#### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
www.cisco.com  
Tel: 408 526-7660  
Fax: 408 527-0883

#### **Asia Pacific Headquarters**

Cisco Systems, Inc.  
168 Robinson Road  
#28-01 Capital Tower  
Singapore 068912  
www.cisco.com  
Tel: +65 6317 7777  
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the **Cisco Website** at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus  
Czech Republic • Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel  
Italy • Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal  
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden • Switzerland • Taiwan  
Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2006 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0601R)

